

Customer Information

OSRAM

Copyright © All rights reserved

Subject to change without notice. Errors and omissions excepted.

Printed by M.MARESCH at 09:59:10 EST 09.08.2021

AM_FIX_SL103_customer_information

RL 2021-08-09

9C1 4312776-EN-01

Released

AM-ENT-IND SSL&EL H 330

ECM

Manuel Maresch AMW

Template: ZOT 10000028

External no.:

Page 1 of 3

OSRAM GmbH: Chairman of the Supervisory Board: Dr. Thomas Stockmeier; Managing Directors: Ingo Bank (Chairman), Kathrin Dahnke, Babette Fröhlich; Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-Nr. DE 71568000

LEDguardian TRUCKFLARE Signal TA19 OSRAM



#OSRAM_OLQ(V)

#330 #M. MARESCH

#

#AMW #AM_FIX_SL103_customer_information

2021-08-09

#RL-Released

9C1 4312776-EN-01

AM_FIX_SL103_customer_information

RL 2021-08-09

9C1 4312776-EN-01

Released

AM-ENT-IND SSL&EL H 330

ECM

Manuel Maresch AMW

Template: ZOT 10000028


External no.:

Page 2 of 3

OSRAM GmbH: Chairman of the Supervisory Board: Dr. Thomas Stockmeier; Managing Directors: Ingo Bank (Chairman), Kathrin Dahnke, Babette Fröhlich; Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-Nr. DE 71568000

Product dimensions

Dimensions (diameter, height)	90.7 X 42.7 X 236.5
-------------------------------	---------------------

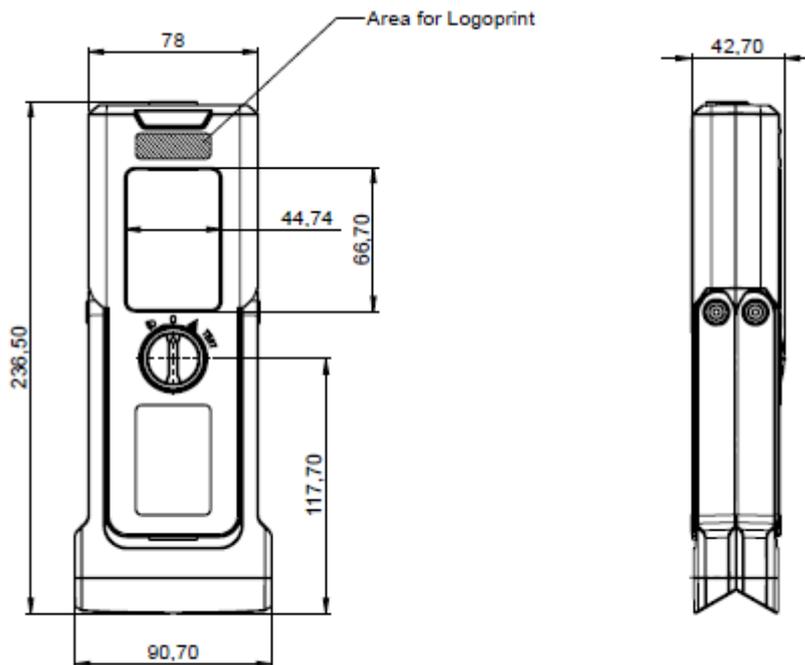

Product information

Product weight	690g including batteries
Lumen	100lm

Customer Information



Copyright © All rights reserved

Subject to change without notice. Errors and omissions excepted.

Printed by M.MARESCH at 09:59:10 EST 09.08.2021

AM_FIX_SL103_customer_information

RL 2021-08-09

9C1 4312776-EN-01

Released

AM-ENT-IND SSL&EL H 330

ECM

Manuel Maresch AMW

Template: ZOT 10000028

External no.:

Page 3 of 3

OSRAM GmbH: Chairman of the Supervisory Board: Dr. Thomas Stockmeier; Managing Directors: Ingo Bank (Chairman), Kathrin Dahnke, Babette Fröhlich; Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-Nr. DE 71568000

LED	6 pcs (white light), 6 pcs (yellow light)
Maximum power	3W
Color temperature	6000 K (white light), 2000 K (yellow light)
Battery type	4xAA common alkaline battery
Luminous intensity	70 lx
Ambient temperature	min. -10° - max. +40°
Protection class	IP54, IK06
Guarantee	2 years
Product Lifetime	flashing mode yellow (50hrs), 6 months w/o usage
Working mode	- OFF - Battery Test Mode (according to StVZO§22aTA19) - Working Mode (White continuous light) - Emergency Mode (Yellow blinking light)

Regulations (Vorschriften)

Product certification/street legal regulation	CE, TA19 StVZO certified Certified acc. TA19 German street regulation (fully regulated) Approval number: K 1690
---	---

Successive listing of changes (Änderungsfortschreibung)

Issue (Ausgabe):	Reason for change (Änderungsgrund):
11.05.2021	First edition (Erstausgabe)

#OSRAM OLQ(V)
#330 #M.MARESCH
#AMW #AM_FIX_SL103_customer_information
2021-08-09
#RL-Released
9C1 4312776-EN-01